




ESLON®-DC ESD

PMMA AC445AS

ESD-Standard

AC445AS | ■ yellow

SPECTRAL TRANSMITTANCE [%]

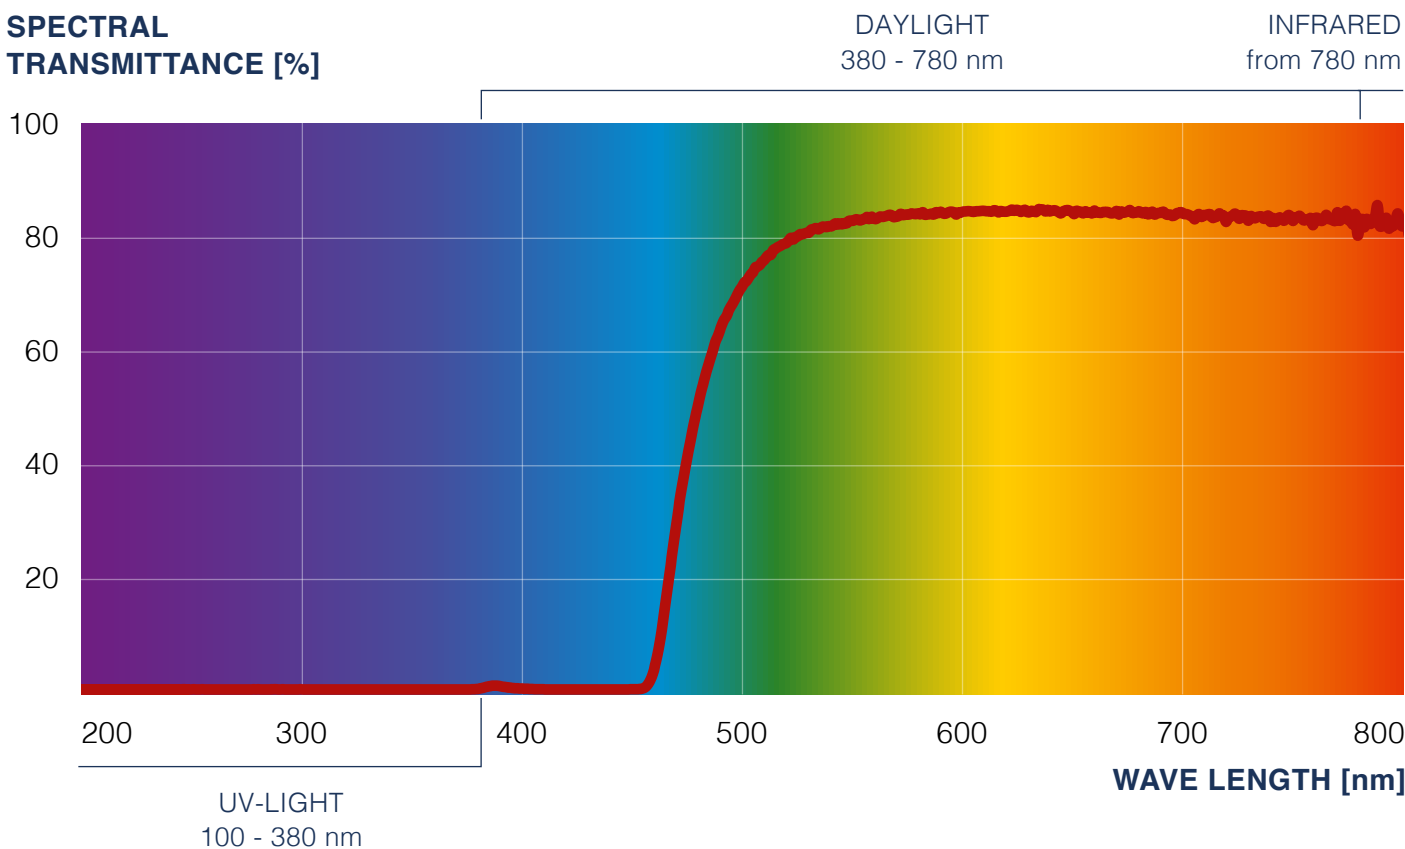

UV-RANGE ACC. TO DIN 5031

- UV-A** 315nm - 380 nm
- UV-B** 280nm - 315 nm
- UV-C** 100nm - 280 nm

TRANSMITTANCE VALUE

62 %

HAZE VALUE

3 %

REFRACTIVE INDEX

1.49

All data refer to a **sheet thickness of 5mm.**

www.eslon-dc.de



SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
 Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de