


ANTISTATIC AND CONDUCTIVE PROPERTIES

C-PVC ESD-Standard

C-PVC ESD Hard Coat

CS401ATM

VHS401ASM

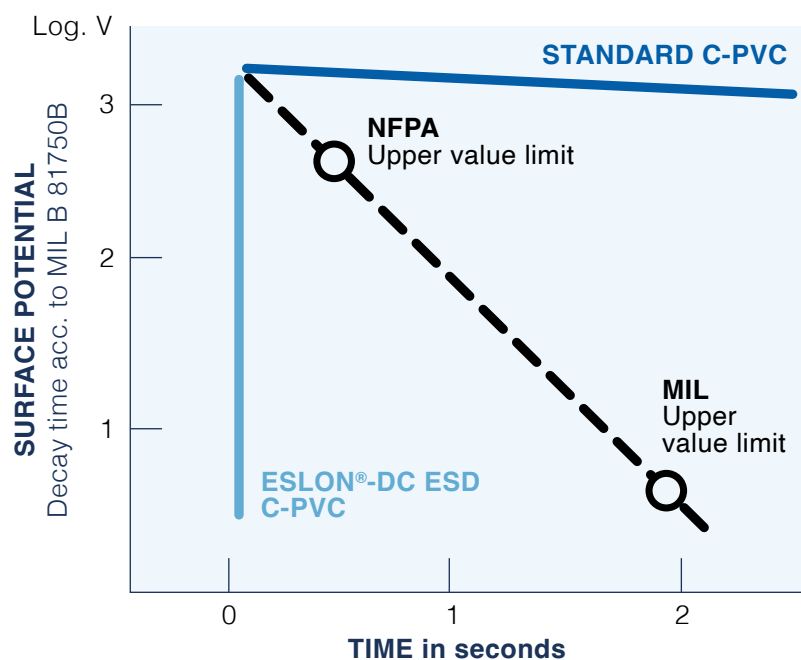


TEST METHOD ACC. TO MIL B 81750B:

1. The test samples will be kept for 24 hours at 23° room temperature and 15 % rel. humidity.
2. A 5.000 V force-charge is applied to the surface of the sample. After grounding, the decay time down to 0 V is measured by a static decay meter.

RÉSULTAT:

The decaying time of **ESLON®-DC ESD C-PVC** is less than 0.1 seconds.

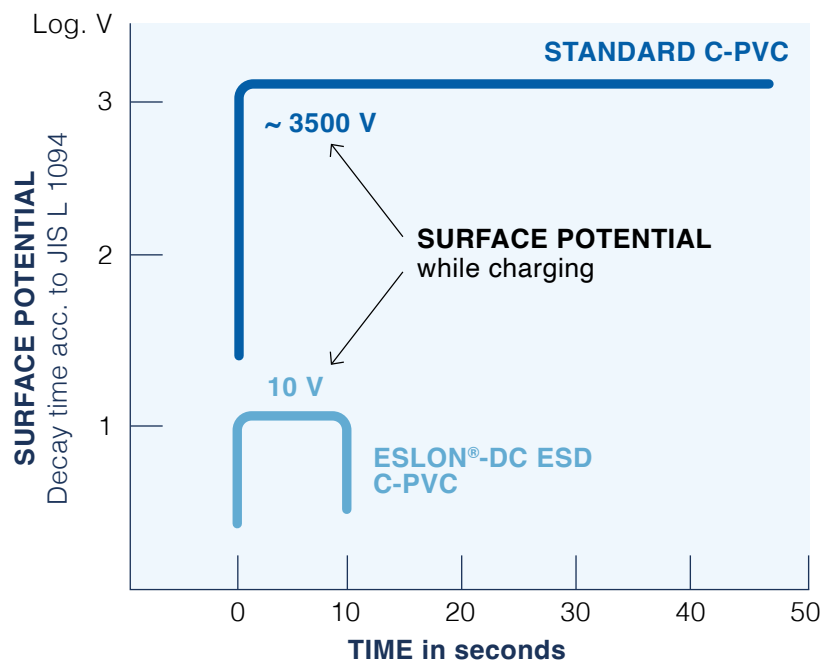

TEST METHOD ACC. TO JIS L 1094:

1. Test performed at 20° room temperature and 85 % rel. humidity.
2. After a corona discharge of 10kV for a duration of 10 seconds, the surface potential and the decay time of the electrostatic discharge (grounded) is recorded.

RÉSULTAT:

The surface potential of **ESLON-DC® ESD C-PVC** during a charge of 10kV remains as low as 10 V and is therefore substantially lower than that of a non-static material, i.e. non-conductive material.

www.eslon-dc.de/en


SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de