

CLEANABILITY AND LIGHT TRANSPARENCY



C-PVC ESD-Standard

C-PVC ESD Hard Coat

CS401ATM

VHS401ASM

ESLON®-DC ESD C-PVC | valid for all versions

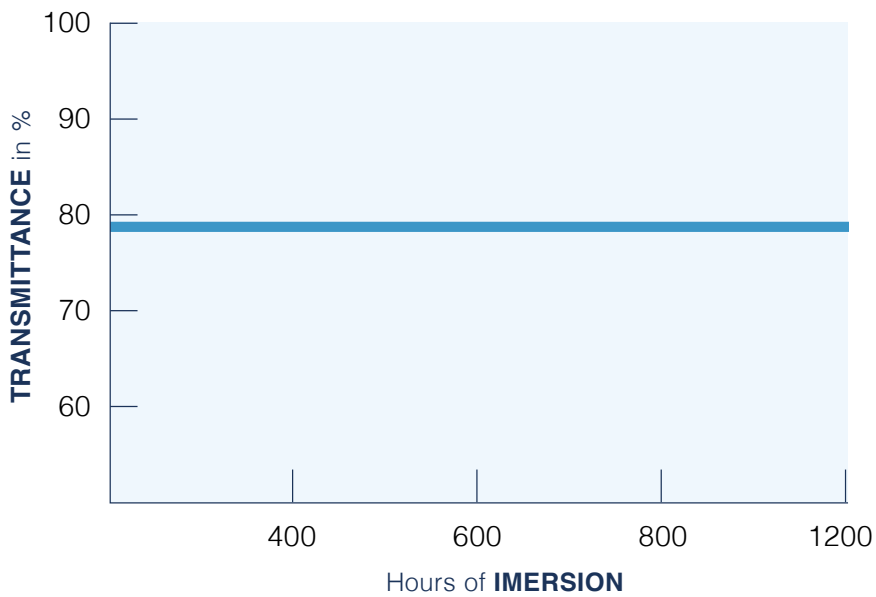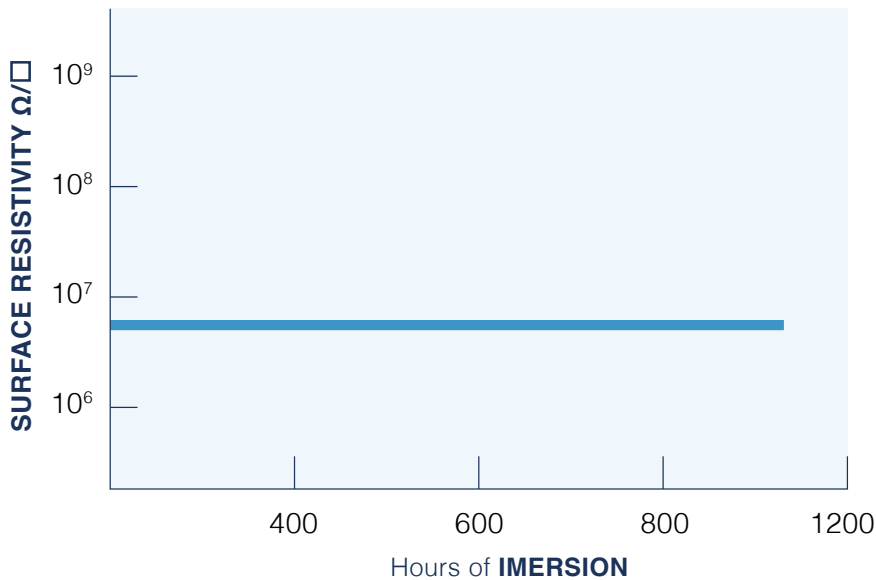

CHEMICAL RESISTANCE & TRANSMITTANCE

Test Condition:
20°C room temperature

Chemical:
Isopropyl Alcohol (IPA)
(Isopropanol)

Test Duration:
1200 hours of immersion

www.eslon-dc.de



SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de