



**ESLON®-DC ESD**

**POLYCARBONATE PC427AS**


ESD-Standard

PC427AS I ■ smoked-brown

**SPECTRAL TRANSMITTANCE [%]**

DAYLIGHT  
380 - 780 nm

INFRARED  
from 780 nm

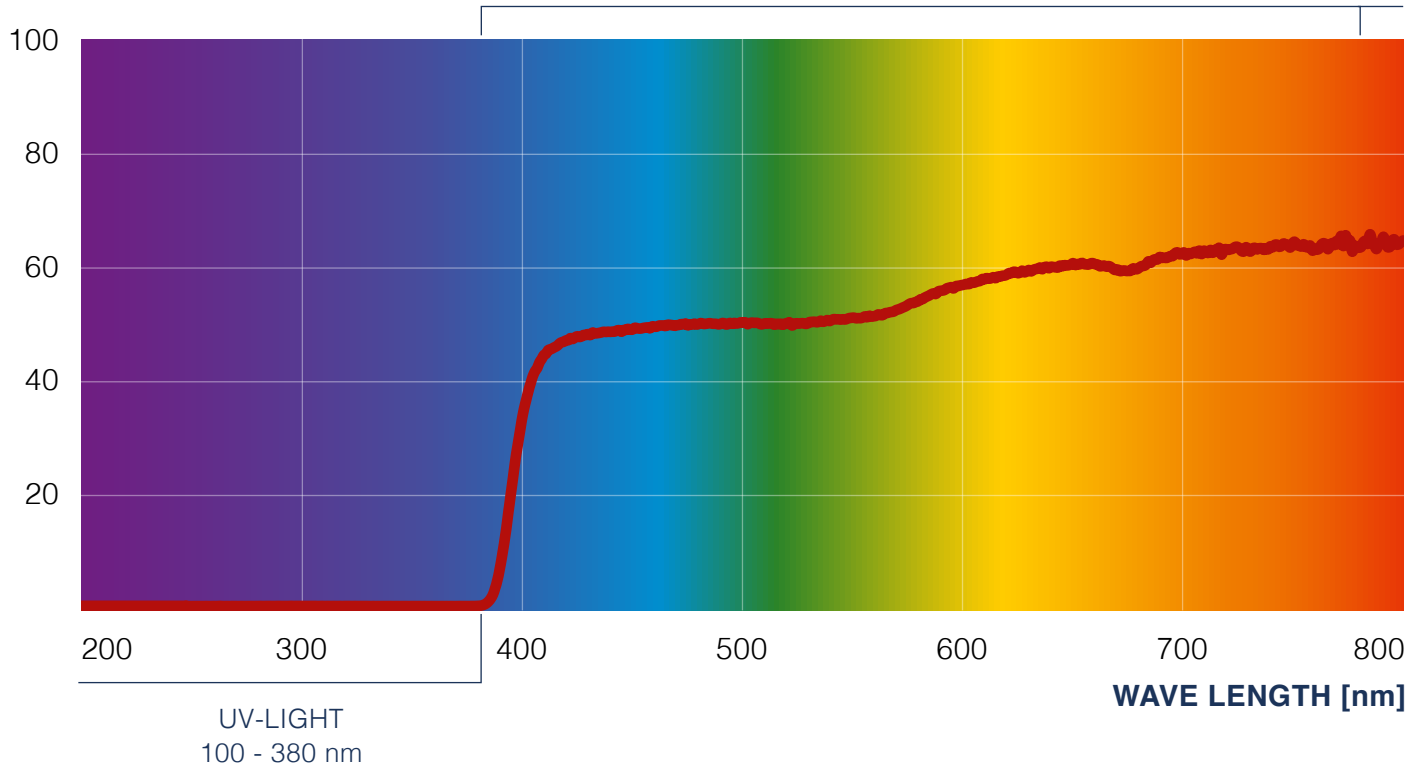

**UV-RANGE ACC. TO DIN 5031**

- UV-A** 315nm - 380 nm
- UV-B** 280nm - 315 nm
- UV-C** 100nm - 280 nm

**TRANSMITTANCE VALUE**

**48 %**

**HAZE VALUE**

**5 %**

**REFRACTIVE INDEX**

**1.59**

All data refer to a **sheet thickness of 3mm.**

[www.eslon-dc.de](http://www.eslon-dc.de)



SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany  
Phone +49 (0) 211 / 36 977 0 | [eslon@sekisui.de](mailto:eslon@sekisui.de)