


MAR AND SCRATCH RESISTANCE OF ESLON®-DC C-PVC-PLATES

C-PVC ESD-Standard

C-PVC ESD Hard Coat

CS401ATM

VHS401ASM

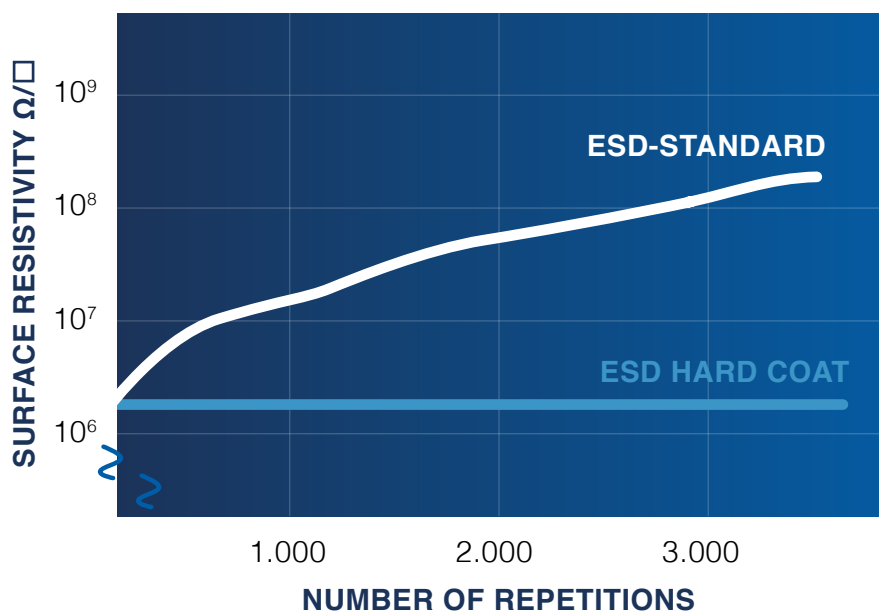

MAR RESISTANCE

Test Condition:


Friction wheel
according to JIS L 0823

Load:

900g/cm²

Abradant:

Dust repellent cloth

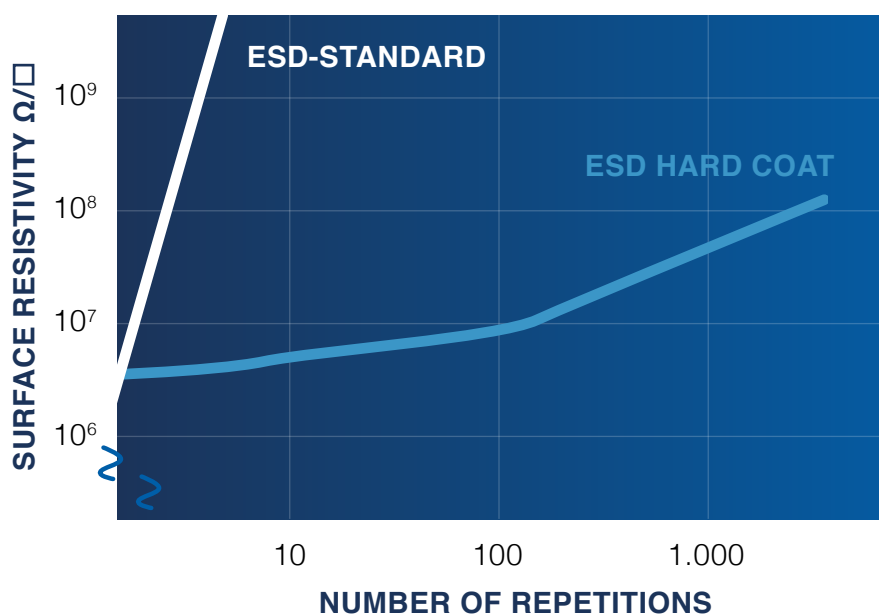

SCRATCH RESISTANCE

Test Condition:

Friction wheel
according to JIS L 0823

Load:

500g/cm²

Abradant:

Steel wool #0000

www.eslon-dc.de


SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de