

CLEANABILITY AND LIGHT TRANSPARENCY



PVC ESD-Standard

- CS401AS
- CE401AS
- CF401AS
- C401AS
- CS421AS
- CS491AS
- C421AS
- C481AS
- CS411AS
- CS441AS
- E132AS

PVC ESD Hard Coat

- VHS401AS
- VHE401AS
- VHS421AS
- VHS441AS
- VH401AS
- VH421AS
- VH411AS

ESLON®-DC ESD PVC | valid for all versions

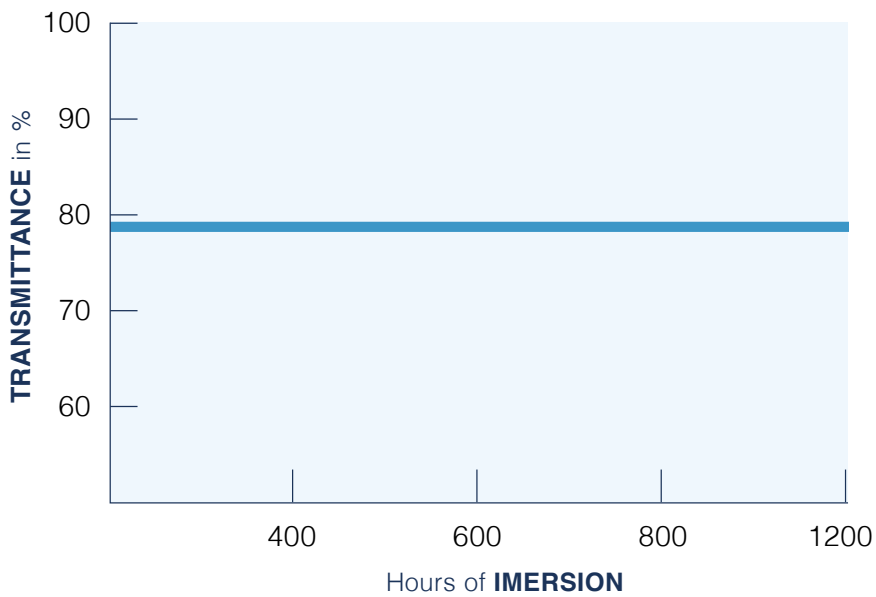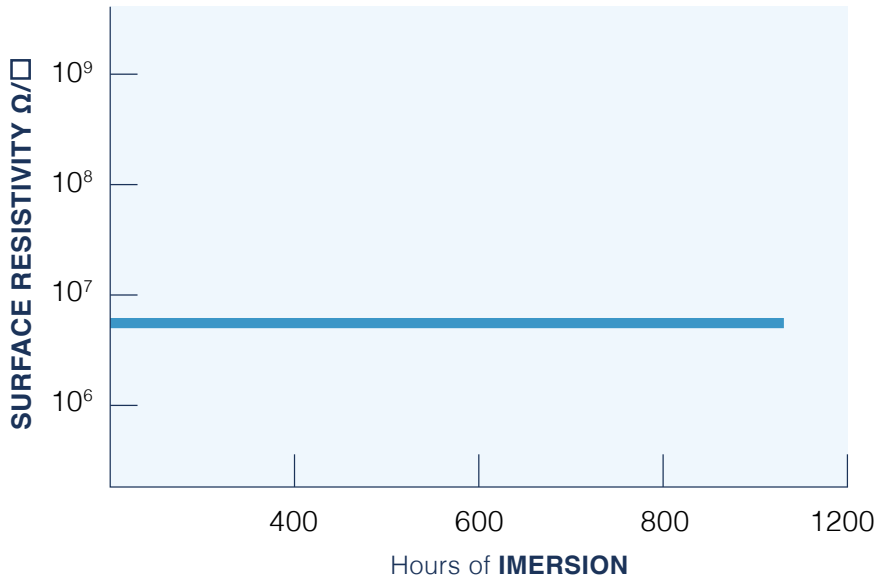

CHEMICAL RESISTANCE & TRANSMITTANCE

Test Condition:
20°C room temperature

Chemical:
Isopropyl Alcohol (IPA)
(Isopropanol)

Test Duration:
1200 hours of immersion

www.eslon-dc.de/en



SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de