






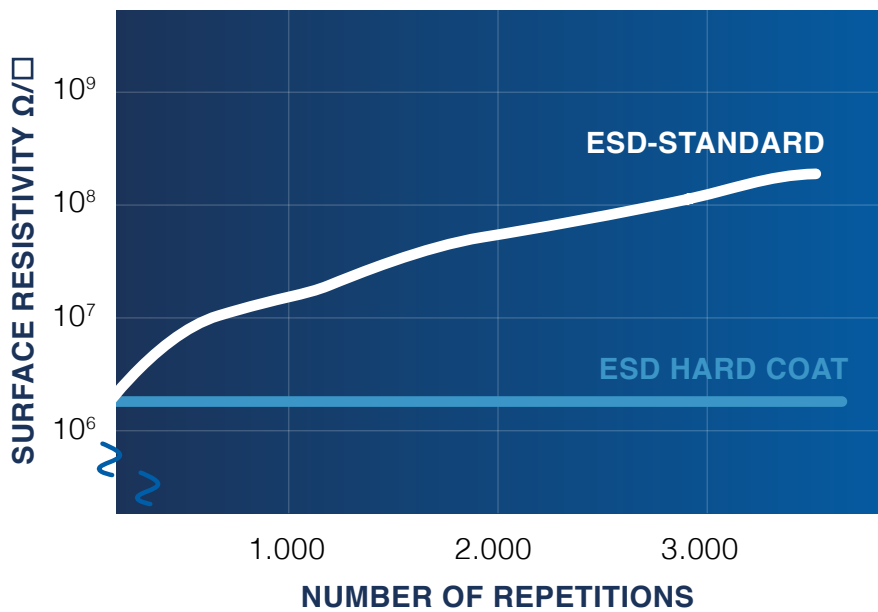
MAR AND SCRATCH RESISTANCE OF ESLON®-DC PVC-PLATES

PVC ESD-Standard

 CS401AS	 CS421AS	 CS411AS
 CE401AS	 CS491AS	 CS441AS
 CF401AS	 C421AS	 E132AS
 C401AS	 C481AS	

PVC ESD Hard Coat

 VHS401AS	 VH401AS
 VHE401AS	 VH421AS
 VHS421AS	 VH411AS
 VHS441AS	



MAR RESISTANCE

Test Condition:


Friction wheel
according to JIS L 0823

Load:

900g/cm²

Abradant:

Dust repellent cloth

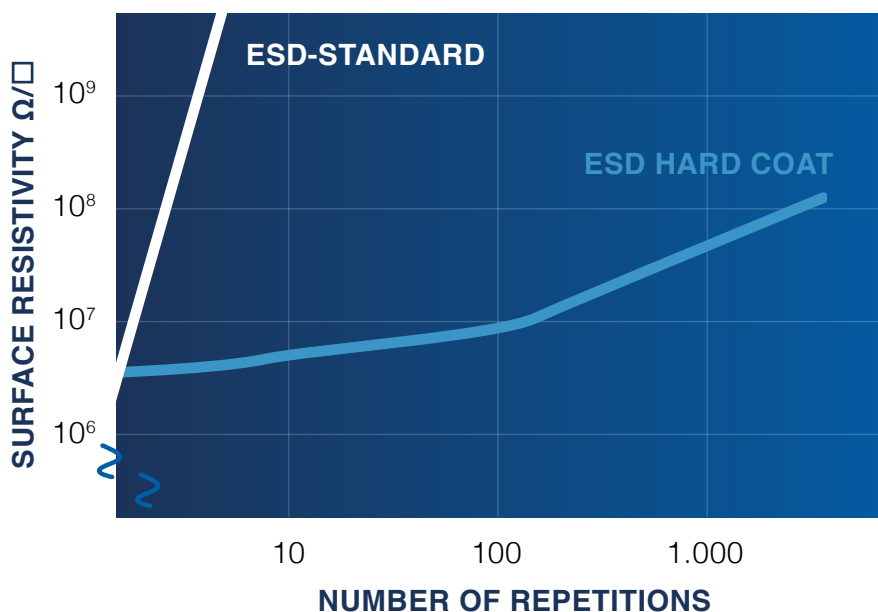

SCRATCH RESISTANCE

Test Condition:

Friction wheel
according to JIS L 0823

Load:

500g/cm²

Abradant:

Steel wool #0000

www.eslon-dc.de/en