

CLEANABILITY AND LIGHT TRANSPARENCY



Polycarbonate ESD-Standard

- PC407AS
- PC427AS
- PC497AS
- PC417AS
- PC447AS

Polycarbonate ESD Hard Coat

- PH407AS
- PH427AS
- PH417AS
- PH447AS
- PH407ASO
- PH407ASU

ESLON®-DC ESD Polycarbonate | valid for all versions

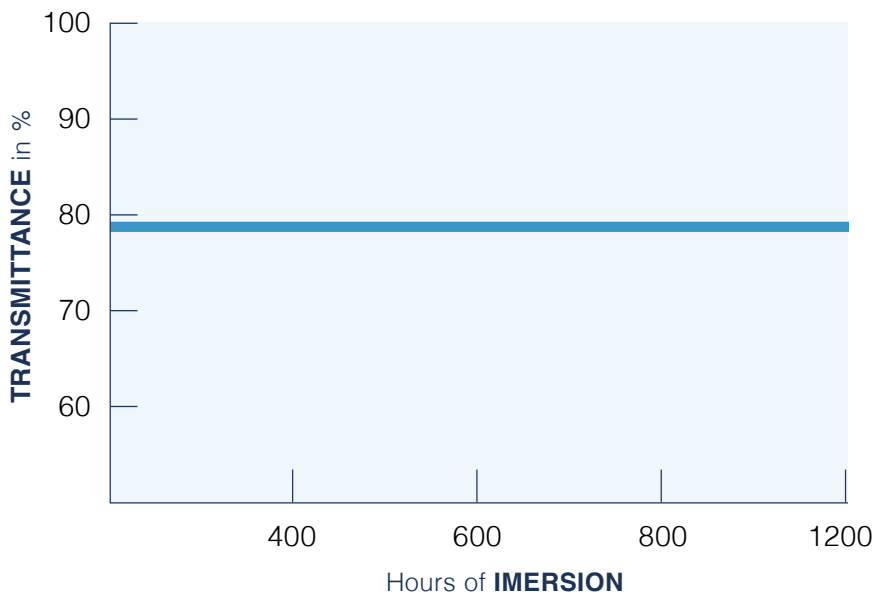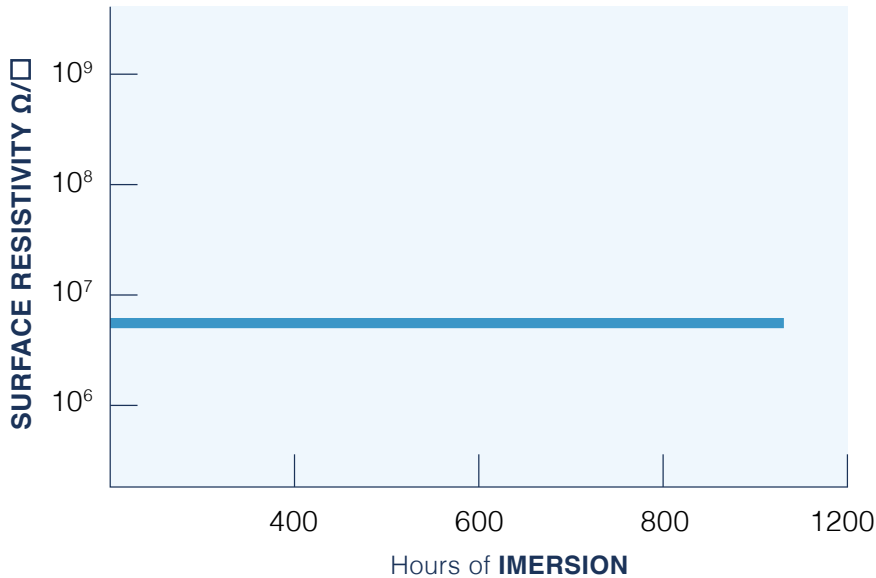

CHEMICAL RESISTANCE & TRANSMITTANCE

Test Condition:
20°C room temperature

Chemical:
Isopropyl Alcohol (IPA)
(Isopropanol)

Test Duration:
1200 hours of immersion

www.eslon-dc.de



SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de