


MAR AND SCRATCH RESISTANCE OF ESLON[®]-DC POLYCARBONATE-PLATES

Polycarbonate ESD-Standard

- PC407AS
- PC417AS
- PC427AS
- PC447AS
- PC497AS

Polycarbonate ESD Hard Coat

- PH407AS
- PH427AS
- PH407ASO
- PH417AS
- PH407ASU
- PH447AS

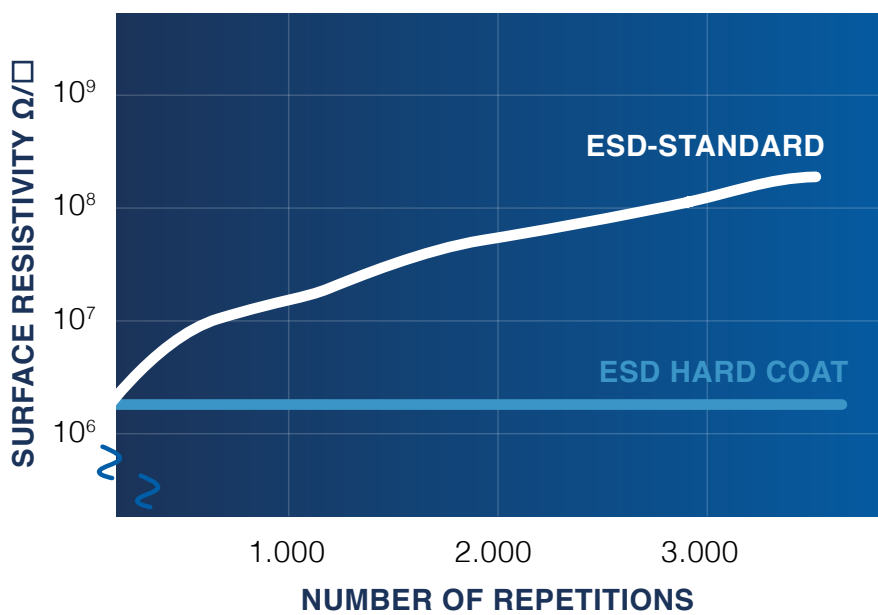

MAR RESISTANCE

Test Condition:


Friction wheel
according to JIS L 0823

Load:

900g/cm²

Abradant:

Dust repellent cloth

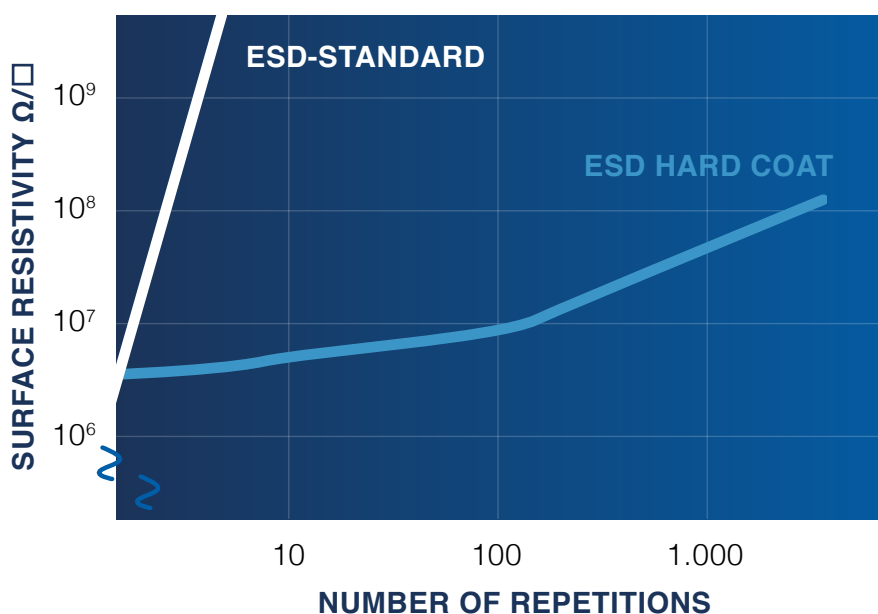

SCRATCH RESISTANCE

Test Condition:

Friction wheel
according to JIS L 0823

Load:

500g/cm²

Abradant:

Steel wool #0000

www.eslon-dc.de

SEKISUI

SEKISUI Chemical GmbH | Roßstraße 92 | 40476 Düsseldorf | Germany
Phone +49 (0) 211 / 36 977 0 | eslon@sekisui.de